


Data sheet

Commercial Art.No.: 92.030.0953.1

Distributor GST18i3V 5P1 BV SW

GST18i3 HH-distributor, 3 pole, 1 IN, 5 OUT, with mounting option on separate mounting plate, coding mains 250 V, 20 A, coding color black

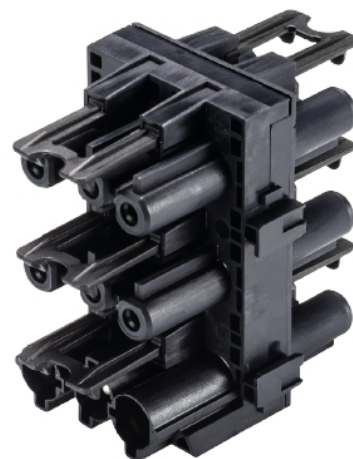

Certificates / Approvals



Technical data

General

Rated current	20 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	2
Mechanical coding	Code 1
Lockable	self-locking (unlocking by tool)
Color of coding/ contact carrier	black
Marking of poles	L, N, PE

Model

Number of inputs	1
Number of outputs	5
Type of fastening	yes
Degree of protection (IP)	IP20
Type of distributor	HH-distributor

Material

Housing material	Polyamide
halogen free	yes
Contact material	CuZn
Fire load	0.216 kWh
Insulation components continuous temperature	100 °C
Surface finish	Tin-plated

Dimensions

Length	58 mm
--------	-------

Width	34.9 mm
Height	52.5 mm

Classification

ECLASS 11	
ECLASS 8.1	27440603
ETIM 7.0	EC002567
ETIM 6.0	EC002567
ETIM 5.0	EC002567
ETIM 4.0	EC002567

Product compliance

ROHS conformity status	Compliant/Exempted
ROHS exceptions	III-6(c)
REACH-SVHC conformity status	Duty-To-Declare
REACH-SVHC substances	Lead
REACH-SVHC CAS numbers	7439-92-1