

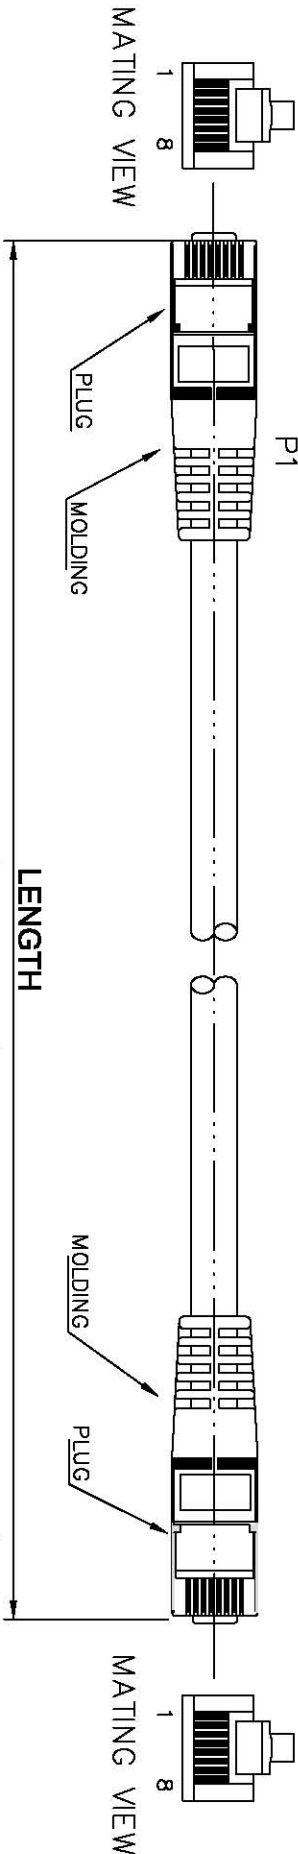


DATE	REV	DESCRIPTION	BY	CHKD
07/21	A/0	NEW	CAOWEN	YZG



Marking:ACT CATEGORY 5E FTP PATCH CABLE 3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-2-2 & IEC 60332-1-2 ▲ 26AWGX4P
(UL) c(UL) CMH E164469-XX LEADFREE EN71 15000.001

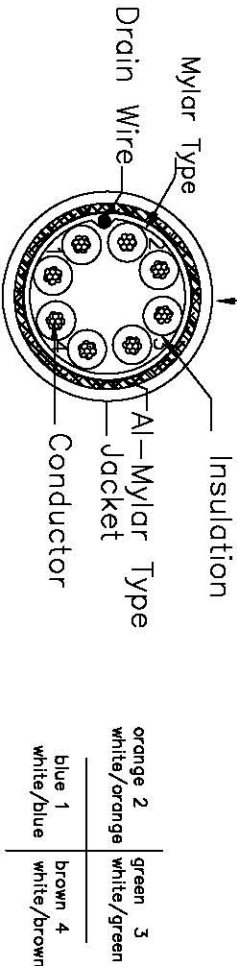

Conductor	Bare Copper 26AWG
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.88±0.06mm
Jacketing PVC	Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:5.6±0.2mm

WIRE	CAT.5E FTP STR 26AWG*4P
PLUG	RJ45 8P8C
LENGTH	0.5M, 1M, 1.5M, 2M, 3M, 5M, 7M, 10M, 15M, 20M, 25M
WIRE COLOR	no. item color ral no.
1	IB71XX gray RAL9002
2	IB72XX ivory RAL1015

ITEM NO	Length
IB7100	0.5M
IB7101	1M
IB7102	2M
IB7103	3M
IB7105	5M
IB7107	7M
IB7110	10M
IB7115	15M
IB7120	20M
IB7125	25M
IB7151	1.5M

Unless specified on the drawing, tolerances are per the follows:

± 1
X ± 0.2
XX ± 0.05



PIN OUT			
PA/R	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
	3	WHT/GRN	3
3	6	GRN	6
	4	BLU	4
1	5	WHT/BLU	5
	7	WHT/BRN	7
4	8	BRN	8

3RD		
DRAW. NO	ITEM	IB71XX,IB72XX
DEPARTMENT	LAN DEP	CAOWEN
SCALE	CHECKER	DATE
UNIT	MM	APPROVAL
		DATE

RoHS Compliant