


**Middle Atlantic Products**

EXCEPTIONAL SUPPORT &amp; PROTECTION™


**EIA/TIA Compliant**

# RRF Full-Hole Rackrail


## Features

- Tapped for 10-32 threads
- Threaded rack rail is 1/8" [3mm] thick
- Suitable for use in 19-1/8" [486mm] wide openings
- Sold in pairs



RRF

## RRF basic dimensions

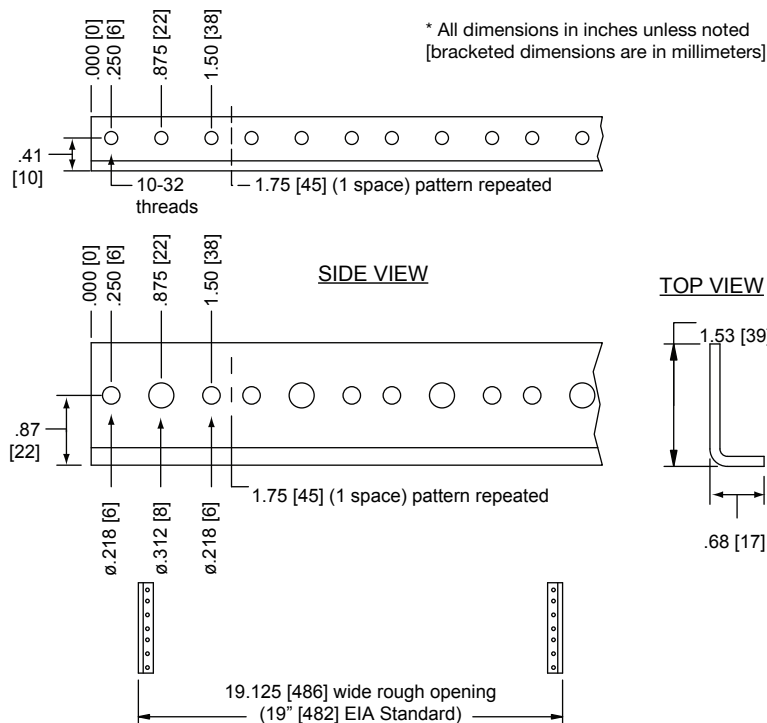

| PART # | LENGTH | RACKING HEIGHT | MATERIAL     |
|--------|--------|----------------|--------------|
| RRF2   | 3.50"  | (2 spaces)     | 0.125" steel |
| RRF4   | 7.00"  | (4 spaces)     | 0.125" steel |
| RRF6   | 10.50" | (6 spaces)     | 0.125" steel |
| RRF8   | 14.00" | (8 spaces)     | 0.125" steel |
| RRF12  | 21.00" | (12 spaces)    | 0.125" steel |
| RRF14  | 24.50" | (14 spaces)    | 0.125" steel |
| RRF16  | 28.00" | (16 spaces)    | 0.125" steel |
| RRF18  | 31.50" | (18 spaces)    | 0.125" steel |
| RRF21  | 36.75" | (21 spaces)    | 0.125" steel |
| RRF27  | 47.25" | (27 spaces)    | 0.125" steel |
| RRF45  | 78.75" | (45 spaces)    | 0.125" steel |

## Architects' and Engineers' Specifications

EIA/TIA compliant RRF Series Rackrail shall be Middle Atlantic Products model number RRFx (refer to chart). Rackrail shall be 1/8" thick steel. Rail shall be x rackspaces in length (refer to chart) pre-treatment process shall be 3 stage iron phosphate. Steel rackrail shall be finished with a durable black e-coat. Rackrail shall be GREENGUARD Indoor Air Quality Certified for Children and Schools. Rackrail shall be RoHS EU Directive 2002/95/EC compliant. Rackrail

shall be manufactured by an ISO 9001 and ISO 14001 registered company. Rackrail shall be warranted to be free from defects in material or workmanship under normal use and conditions for the lifetime of the product.

**CUSTOMIZABLE SPECIFICATION CLIPS AVAILABLE AT MIDDLEATLANTIC.COM**